

Please find to follow a quick guide on how to connect TrackKing-1 to you PC, print and save tag identification numbers:

### 1. Create a Folder

Before beginning, the user should create a 'new folder' somewhere they can easily locate on their PC. An ideal location is on the desktop:

- Right click on the desktop > new > folder and choose a name such as 'TrackKing-1 Read Log'

### 2. Connecting TrackKing-1 to your PC


- Please ensure the reader is switched off or powered down
- Connect the USB cable supplied to your reader and then to your PC
- When the reader connects to a Windows based PC the following pop up appears




### 3. Viewing, Saving & Printing Tag Numbers Read

- Click on 'Open folder to view files' The following screen will appear:

## TrackiNG-1 Quick Print and Save Guide – August 2014

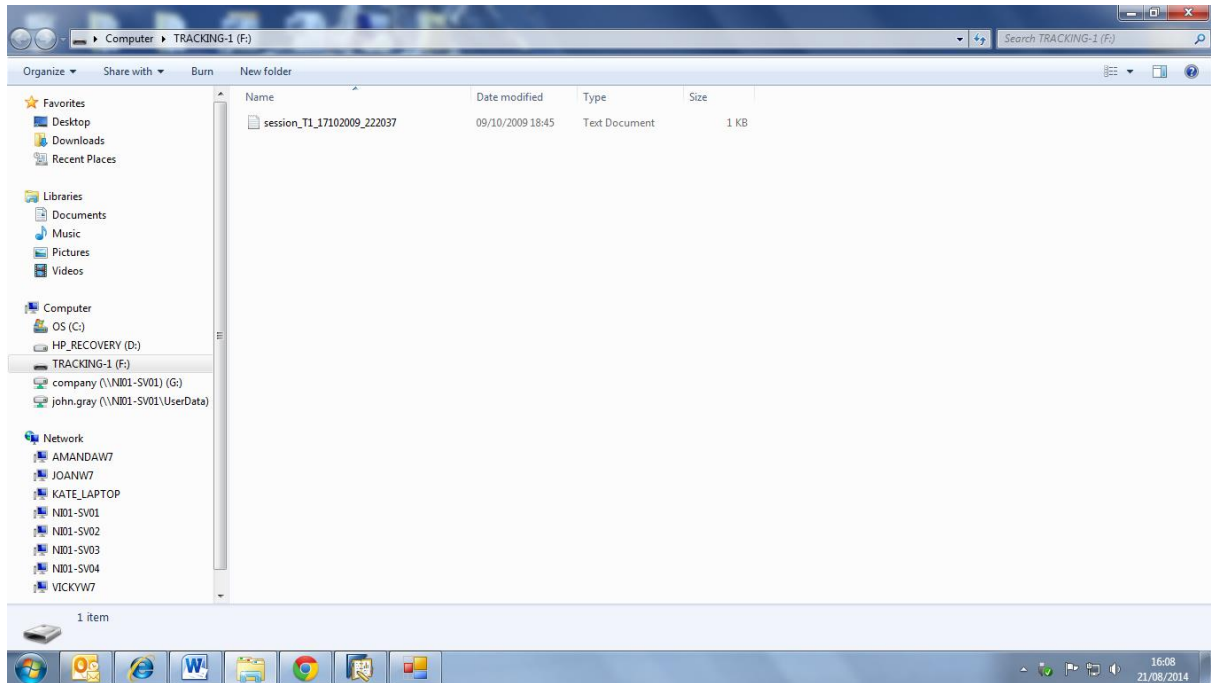

- Double click on the file entitled 'Session' which will open and list all the tag reads held within the reader, as below.

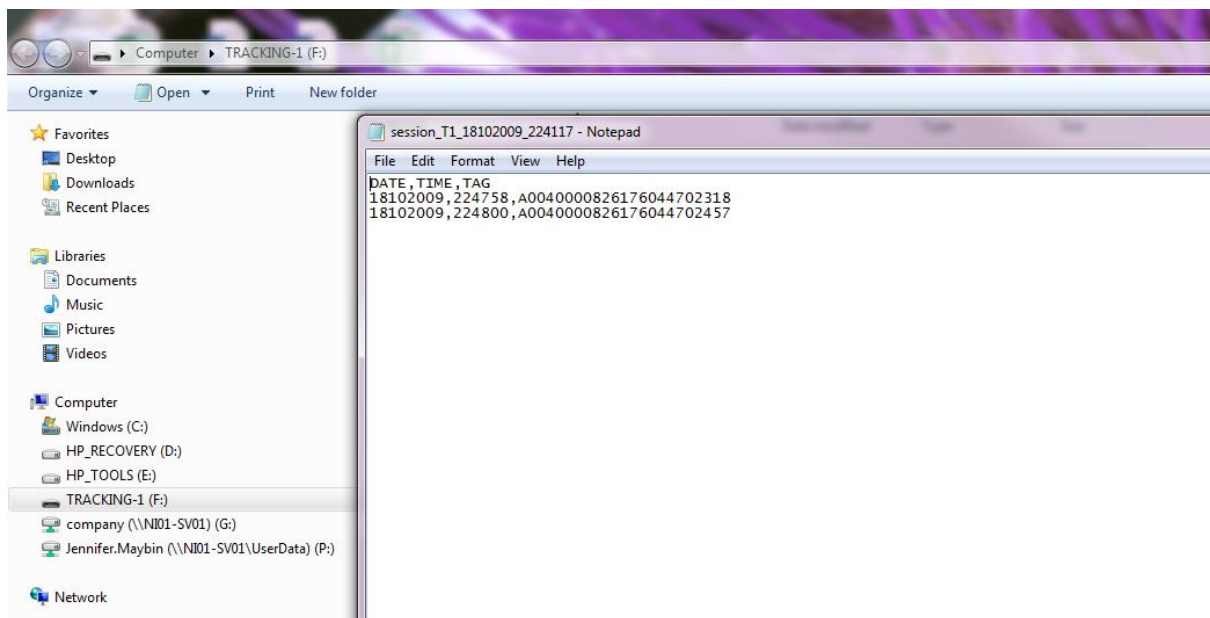

- To Print the tag numbers choose File and Print
- To save the tag numbers choose File and Save As from the list as shown below




**Head Office** 7a Churchfield Road, Ballycastle, Co Antrim, BT54 6PJ  
**Tel:** +44 (0) 28 2076 8696  
**Email:** [info@quicktag.co.uk](mailto:info@quicktag.co.uk)


**Fax:** +44 (0) 28 2076 8699  
**www.quicktag.co.uk**



## TrackiNG-1 Quick Print and Save Guide – August 2014

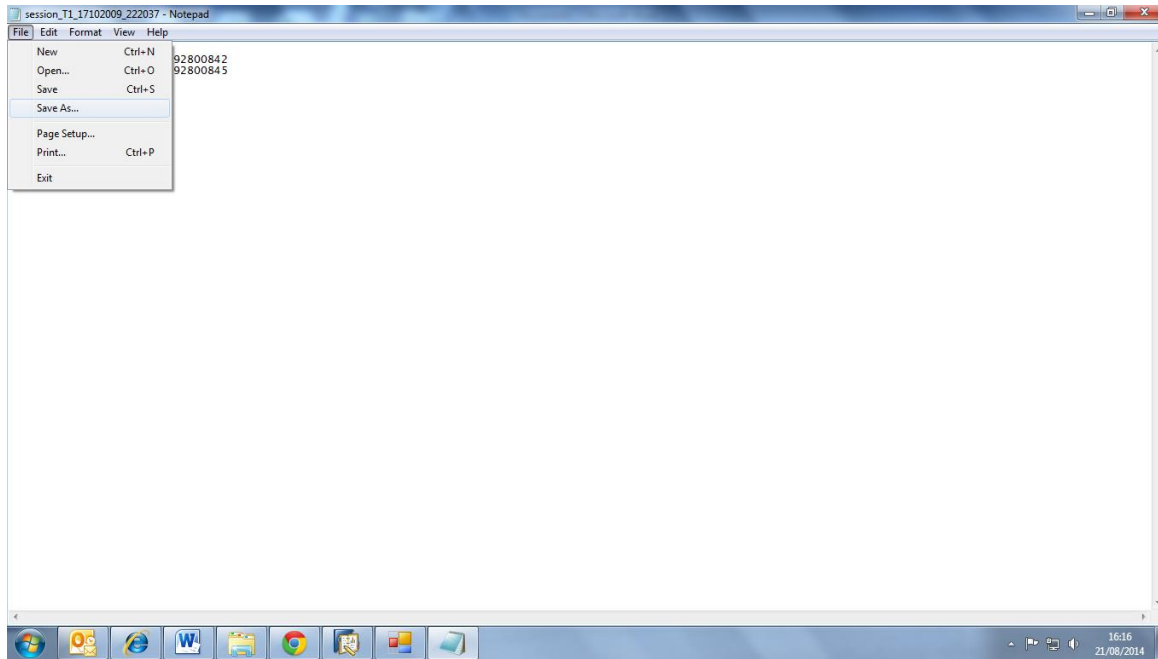

- Save to a location of your choice however the folder created at the start of this guide called TrackiNG-1 Read Log and located on your desktop is an ideal place.

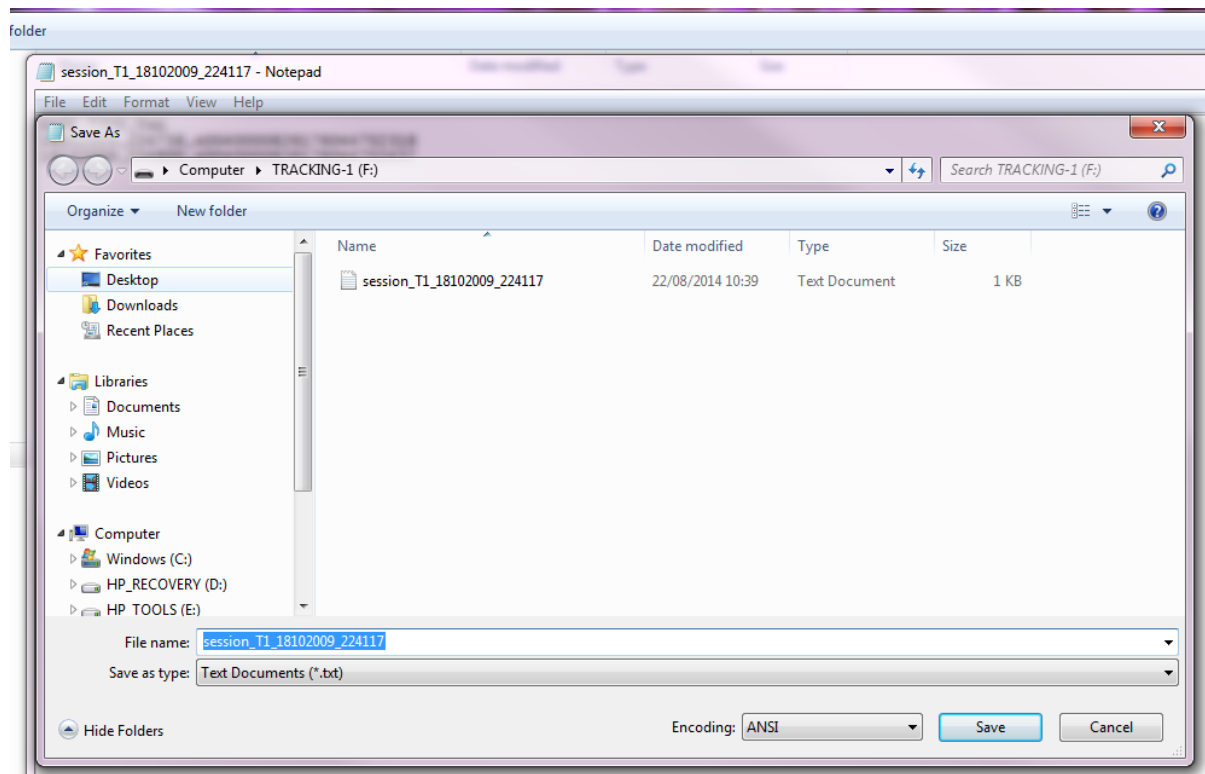


- Give the file to be saved a name of your choice, otherwise it will be saved under the File name as appearing and click 'Save'


#### 4. Deleting Tag Numbers From Your Reader

If you wish you can now delete the saved files from your reader.

- Go to the your PC Windows Start Menu (see below) and click on My Computer

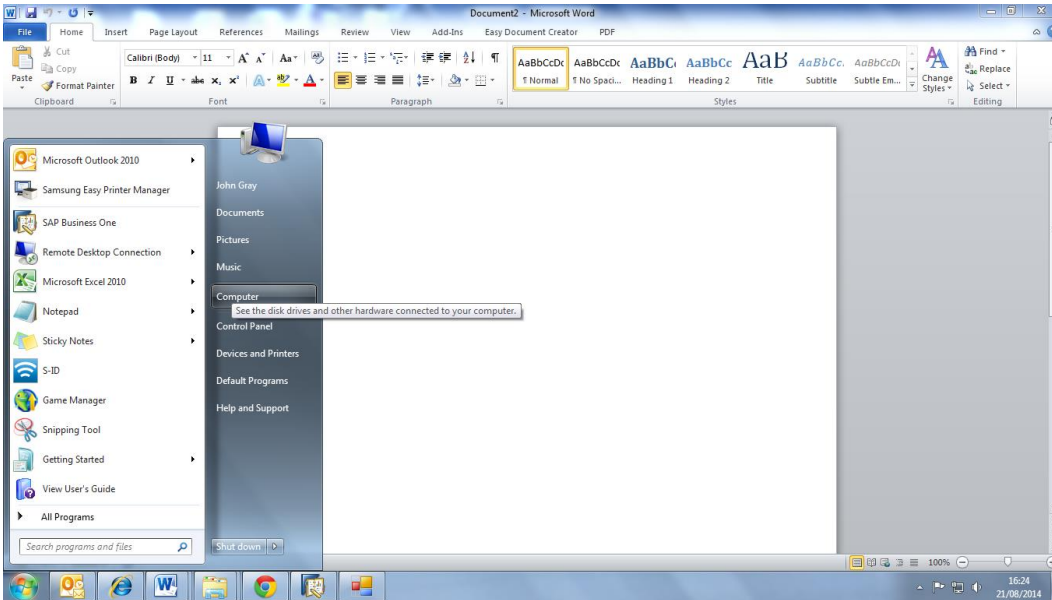

- The screen below will appear

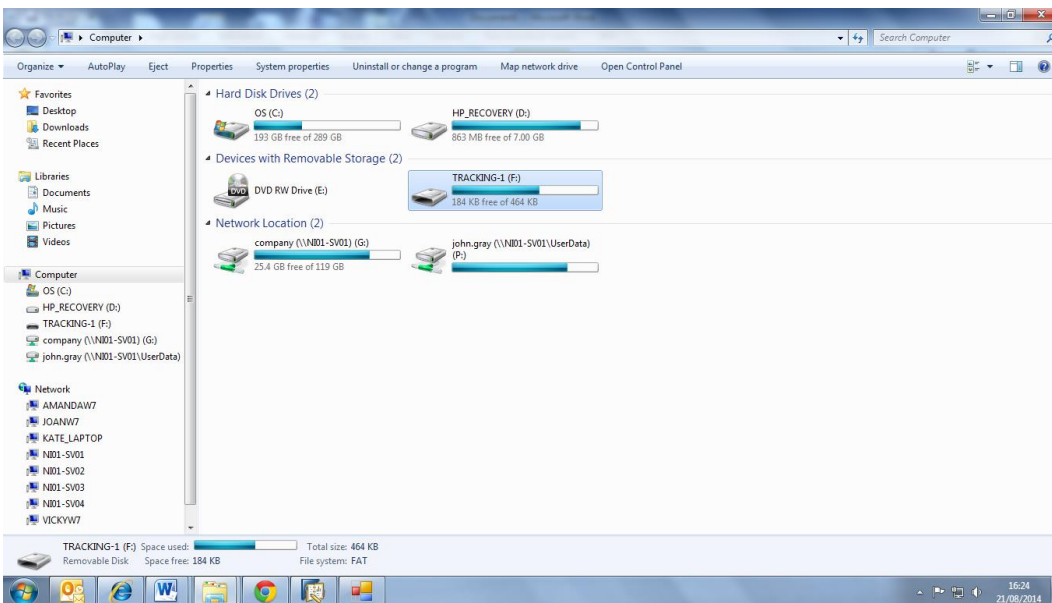

- Double click on Tracking 1
- Right click on the session file name and select delete. This will delete all the tag data currently held on the reader. **Please ensure you have all session data saved and printed before doing this.**